

Dear All,

Pl find attached designs, specifications and photos and estimated cost of the monkey capture and transport cages being used to capture monkeys and their transportation to existing Monkey Sterilisation Centers at Tutikandi(Shimla), Sastar(hamirpur), Gopalpur(Palampur) and Boul(Una).

Each DFO(T) should ideally get these constructed locally . Each DFO(T) shall require 4 sets per division to start capturing of Monkeys at 4 locations/ beats simultaneously in his division.

One set comprises of Capture cage- 1 No( approx cost Rs 12500/- ; Transport cages - 3 nos( approx cost of one transport cage - Rs 4500/- ).


PCCF(T) office is providing funds to selected divisions for this purpose.

You may get in touch with Sh P K Sinha Nodal Officer for this purpose in PCCF(T) office immediately and get you allotment of funds and get these cages manufactured immediately and start monkey capture operations.

Other monkey capturing funds are being allotted to you by PCC(T) separately.

PCCF WL-cum - CWLW,  
Shimla

## DESIGN OF TRANSPORTATION CAGE

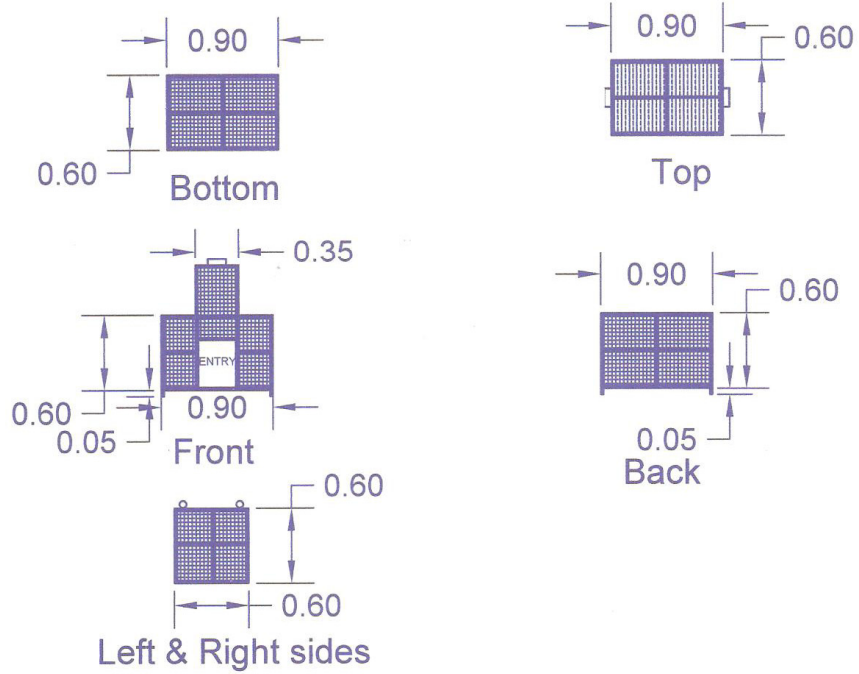

### Specifications Transportation Cages

Frame work: Angle Iron 25x25x4mm @ 1.4kg/m  
with flat iron 20x4mm @ 0.60kg/m cross ties

Covering: Welded wire mesh 25x25mm mesh  
3.15mm dia of wire fixed with the flat 20x4mm in  
A/I frame and M.S. sheet cover on top only.

Structural Pattern: Single Unit.


Other fixtures: All fixtures like lifting handles to lift by  
hand 3Nos including one handle in sliding shutter  
and by sticks 4 nos circular and tail safety stoppers in  
frame of sliding shutter, one small tower bolt at top  
to bolt the slider.

Grinding, Priming and painting complete as directed on site

Approximate weight= 45 kg  
approximate= Cost= 4500/-each



### DESIGN OF CAPTURING CAGE

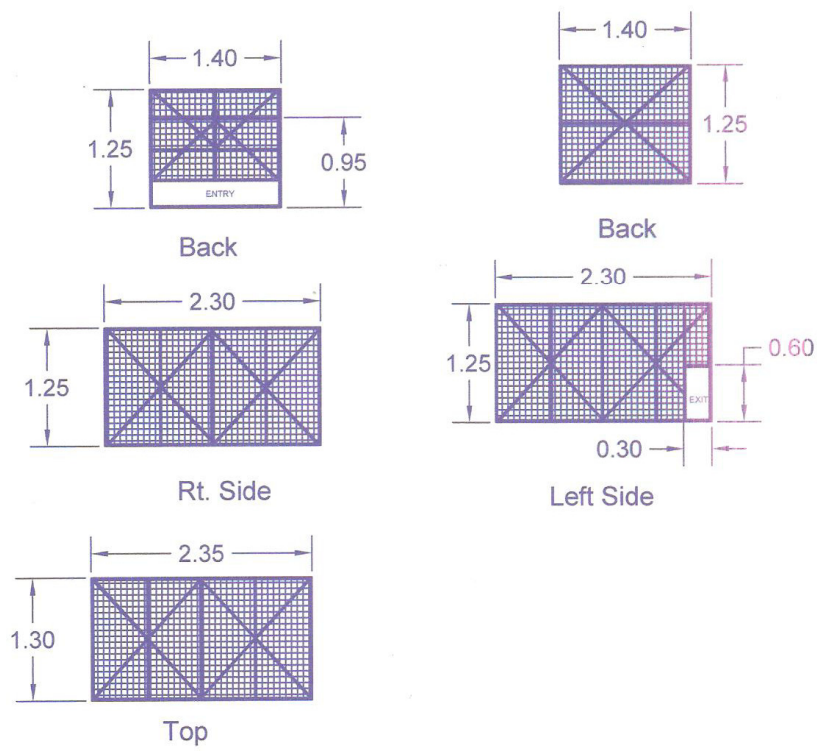

### Specifications Capturing Cage

Frame work: Angle Iron 25x25x4mm @ 1.4kg/m  
with flat iron 20x4mm @ 0.60kg/m cross ties

Covering: Welded wire mesh 25x25mm mesh  
3.15mm dia of wire fixed with the flat 20x4mm in  
A/I frame.

Structural Pattern: Assemblable five pannells to be tied.  
with steel wire strings on site of capturing

Other fixtures: All fixtures like lifting ring to hang up the sliding  
shutter to let the monkeys enter into the cage.

One handle on top of exit sliding shutter  
A small tower bolt at exit sliding shutter

Grinding, Priming and painting complete as directed on site

Approximate weight=150 kg

Approximate Cost= 12500/-



